






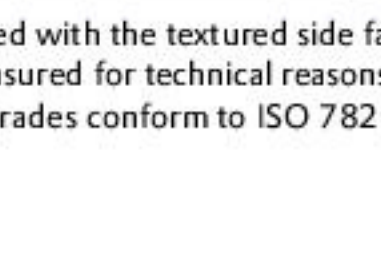







# PLEXIGLAS® Textures

(former PLEXIGLAS® Textured)

## Sheets

Decor	Color Number	Transmission $\tau_{D65}$			Color Sample	Size in mm	Number of sheets per pallet (thickness in mm)				
		TP	%	c			3	4	5	6	8
Clear Honeycomb	0A000 W	TP	92%	c		2500 x 1650	40	✓	✓	✓	✓
Clear Honeycomb	0A000 W	TP	92%	c		2050 x 1650	30	✓	✓	✓	✓
Clear Pearl	0A000 P	TP	92%	c		2050 x 1650	30	✓	✓	✓	✓
Clear Pyramid	0A000 Z	TP	92%	c		2050 x 1650	30	✓	✓	✓	✓
Clear Ribbed	0A000 R	TP	92%	c		2050 x 1650	30	✓	✓	✓	✓
Clear Raindrop/Pinspot	0A000 TK	TP	92%	c		3050 x 2050	20	✓	✓	10	✓
Brown Raindrop/Pinspot	8A470 TK	TP	62%	c		3050 x 2050	✓	✓	✓	✓	✓
Clear Ice Crystal	0A000 E	TP	92%	c		3050 x 2050	20	20	✓	10	✓
Brown Ice Crystal	8A470 E	TP	62%	c		3050 x 2050	✓	✓	✓	10	✓
Grey Ice Crystal	7A007 E	TP	75%	c		3050 x 2050	✓	✓	✓	✓	✓
Clear Bark	0A000 B	TP	92%	c		3050 x 1650	✓	25	✓	20	✓
Clear Crimp	0A000 CL	TP	92%	c		3050 x 1650	✓	✓	✓	20	✓
Brown Crimp	8A470 CL	TP	44%	c		3050 x 1650	✓	✓	✓	✓	✓

The light transmission is given as a typical value for 3 mm thickness. Measurement is performed with the textured side facing the light source. If the textured side is turned away from the light source, the transmittance may be slightly lower due to the texture. Exact values cannot be measured for technical reasons. The light transmission is measured according to test standard DIN 5036, Part 3. The values may vary depending on the type of measuring equipment used. All grades conform to ISO 7823-2, are Light-diffusing, UV-absorbing, (slightly UV-transmitting at less than 3 mm thickness)

TP

transparent

c

transmission as a function of thickness

40

items with colored background are available from stock.

✓

can be manufactured. Please inquire about delivery periods and minimum order quantities for these items.